
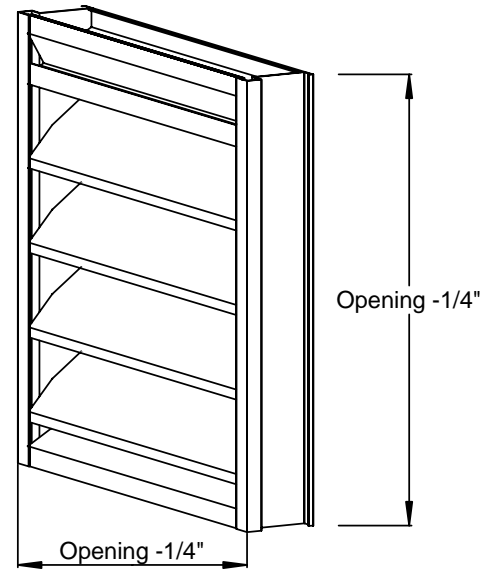



2460/2465 HI PRO 4 INCH EXTRUDED ALUMINIUM DRAINABLE STATIONARY LOUVER

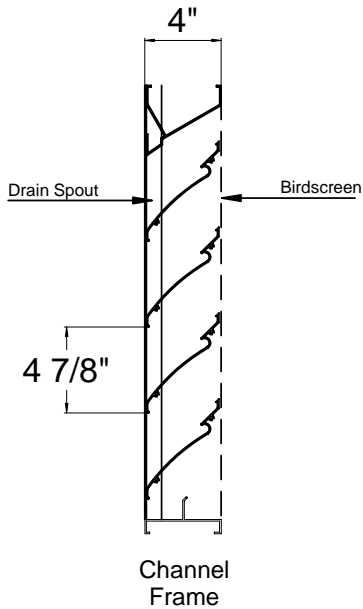

STANDARD CONSTRUCTION

- Depth:** 4 Inches (101 mm)
- Frame Style:** Channel Frame (2460) or Flange Frame (2465)
- Frame Thickness:** 0.081" 6063-T5 Extruded Aluminium
- Blade Thickness:** 0.081" 6063-T5 Extruded Aluminium
- Blade Centres:** 4 7/8" Inches (124 mm)
- Blade Angle:** 45 Degrees
- Minimum Height:** 12 Inches (304 mm)
- Maximum Panel Width:** 120 Inches (3048 mm)
- Maximum Panel Height:** 120 Inches (3048 mm)
- Standard Finish:** Mill
- Standard bird screen:** 1/2 x 1/2 Galvanized
- Free Area of 48" x 48" Unit:** 7.97 Sq.ft. (0.719 m²)
- Free Area
- Free Area Percentage:** 47.9 Percent

AVAILABLE ACCESSORIES

- Bird Screen:** 1/2 x 1/2 Galvanized (Standard)
1/2 x 1/2 Aluminium
- Insect Screen:** 18 x 14 Mesh
- Finish:** Mill Finish (Standard)
Paint Color #: V
- Anodized Finish:** Clear
Light Bronze
Medium Bronze
Dark Bronze
- Accessories:** Blank Off Panel
Insulated Blank Off Panel (1" or 2")
Hinged Frame
Extended Sills
All welded construction
Extended Sleeves
Security Bars

*Louver will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.

Continuous Line construction is NOT recommended.

**4" Extruded Aluminium High Performance Stormproof Louver
Free Area in Square Feet**

		WIDTH IN INCHES															
Inches	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72	
	12	0.20	0.28	0.37	0.45	0.53	0.62	0.70	0.78	0.87	0.95	1.03	1.12	1.20	1.28	1.37	1.45
	16	0.34	0.49	0.63	0.77	0.92	1.06	1.21	1.35	1.49	1.64	1.78	1.93	2.07	2.21	2.36	2.50
	20	0.55	0.79	1.02	1.25	1.49	1.72	1.95	2.19	2.42	2.65	2.89	3.12	3.35	3.59	3.82	4.05
	24	0.68	0.97	1.26	1.55	1.84	2.13	2.42	2.71	2.99	3.28	3.57	3.86	4.15	4.44	4.73	5.02
	28	0.82	1.17	1.51	1.86	2.21	2.55	2.90	3.24	3.59	3.94	4.28	4.63	4.98	5.32	5.67	6.01
H	32	0.96	1.36	1.77	2.17	2.57	2.98	3.38	3.78	4.19	4.59	5.00	5.40	5.80	6.21	6.61	7.02
	36	1.09	1.55	2.01	2.47	2.93	3.40	3.86	4.32	4.78	5.24	5.70	6.16	6.62	7.08	7.54	8.00
E	40	1.33	1.90	2.46	3.02	3.59	4.15	4.71	5.28	5.84	6.40	6.97	7.53	8.09	8.66	9.22	9.78
	44	1.46	2.08	2.70	3.32	3.94	4.55	5.17	5.79	6.41	7.03	7.65	8.26	8.88	9.50	10.12	10.74
I	48	1.60	2.27	2.95	3.62	4.29	4.97	5.64	6.31	6.99	7.67	8.34	9.01	9.68	10.36	11.03	11.71
	52	1.74	2.47	3.20	3.94	4.67	5.40	6.14	6.87	7.60	8.33	9.07	9.80	10.53	11.27	12.00	12.73
G	56	1.88	2.67	3.47	4.26	5.06	5.85	6.64	7.44	8.23	9.02	9.82	10.61	11.41	12.20	12.99	13.79
	60	2.01	2.86	3.71	4.56	5.41	6.26	7.11	7.96	8.81	9.66	10.51	11.36	12.21	13.06	13.91	14.76
H	64	2.25	3.19	4.14	5.09	6.04	6.98	7.93	8.88	9.83	10.78	11.72	12.67	13.62	14.57	15.51	16.46
	68	2.38	3.38	4.38	5.39	6.39	7.39	8.40	9.40	10.40	11.41	12.41	13.41	14.41	15.42	16.42	17.42
T	72	2.51	3.57	4.63	5.69	6.75	7.81	8.87	9.93	10.99	12.05	13.11	14.17	15.23	16.29	17.35	18.41
	76	2.55	3.63	4.70	5.78	6.86	7.93	9.01	10.09	11.16	12.24	13.32	14.39	15.47	16.55	17.62	18.70
	80	2.69	3.83	4.97	6.10	7.24	8.38	9.51	10.65	11.79	12.92	14.06	15.20	16.33	17.47	18.60	19.74
	84	3.03	4.30	5.58	6.86	8.14	9.41	10.69	11.97	13.25	14.52	15.80	17.08	18.36	19.63	20.91	22.19
	88	3.16	4.49	5.82	7.15	8.49	9.82	11.15	12.48	13.81	15.15	16.48	17.81	19.14	20.48	21.81	23.14
	92	3.29	4.68	6.07	7.45	8.84	10.23	11.62	13.00	14.39	15.78	17.17	18.56	19.94	21.33	22.72	24.11
	96	3.43	4.87	6.32	7.77	9.21	10.66	12.10	13.55	15.00	16.44	17.89	19.33	20.78	22.23	23.67	25.12

Model 2460 and 2465

**4" Extruded Aluminium High Performance Louver
Percentage Free Area**

		WIDTH IN INCHES															
Inches	12	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72	
	12	19.8%	21.1%	21.9%	22.4%	22.8%	23.1%	23.3%	23.5%	23.6%	23.8%	23.9%	23.9%	24.0%	24.1%	24.1%	24.2%
	16	25.6%	27.3%	28.3%	29.0%	29.5%	29.9%	30.1%	30.4%	30.6%	30.7%	30.8%	31.0%	31.1%	31.1%	31.2%	31.3%
	20	33.2%	35.4%	36.7%	37.6%	38.2%	38.7%	39.1%	39.4%	39.6%	39.8%	40.0%	40.1%	40.2%	40.4%	40.4%	40.5%
	24	34.2%	36.5%	37.9%	38.8%	39.4%	39.9%	40.3%	40.6%	40.8%	41.0%	41.2%	41.4%	41.5%	41.6%	41.7%	41.8%
	28	35.2%	37.5%	38.9%	39.8%	40.5%	41.0%	41.4%	41.7%	42.0%	42.2%	42.4%	42.5%	42.7%	42.8%	42.9%	43.0%
H	32	35.9%	38.3%	39.7%	40.7%	41.4%	41.9%	42.3%	42.6%	42.8%	43.1%	43.2%	43.4%	43.5%	43.7%	43.8%	43.9%
	36	36.4%	38.8%	40.3%	41.2%	41.9%	42.4%	42.8%	43.2%	43.4%	43.6%	43.8%	44.0%	44.1%	44.3%	44.4%	44.5%
E	40	40.0%	42.7%	44.3%	45.4%	46.1%	46.7%	47.1%	47.5%	47.8%	48.0%	48.2%	48.4%	48.6%	48.7%	48.8%	48.9%
	44	39.9%	42.6%	44.2%	45.3%	46.0%	46.6%	47.0%	47.4%	47.7%	47.9%	48.1%	48.3%	48.4%	48.6%	48.7%	48.8%
I	48	39.9%	42.6%	44.2%	45.2%	46.0%	46.6%	47.0%	47.4%	47.7%	49.8%	48.1%	48.3%	48.4%	48.6%	48.7%	48.8%
	52	40.1%	42.8%	44.4%	45.4%	46.2%	46.8%	47.2%	47.6%	47.8%	48.1%	48.3%	48.5%	48.6%	48.8%	48.9%	49.0%
G	56	40.3%	43.0%	44.6%	45.7%	46.4%	47.0%	47.5%	47.8%	48.1%	48.3%	48.6%	48.7%	48.9%	49.0%	49.1%	49.2%
	60	40.3%	43.0%	44.6%	45.6%	46.4%	47.0%	47.4%	47.8%	48.1%	48.3%	48.5%	48.7%	48.8%	49.0%	49.1%	49.2%
H	64	42.1%	44.9%	46.6%	47.7%	48.5%	49.1%	49.6%	50.0%	50.3%	50.5%	50.7%	50.9%	51.1%	51.2%	51.3%	51.4%
	68	42.0%	44.7%	46.4%	47.5%	48.3%	48.9%	49.4%	49.8%	50.1%	50.3%	50.5%	50.7%	50.9%	51.0%	51.1%	51.2%
T	72	41.9%	44.7%	46.3%	47.4%	48.2%	48.8%	49.3%	49.7%	50.0%	50.2%	50.4%	50.6%	50.8%	50.9%	51.0%	51.1%
	76	40.3%	43.0%	44.6%	45.6%	46.4%	47.0%	47.4%	47.8%	48.1%	48.3%	48.5%	48.7%	48.9%	49.0%	49.1%	49.2%
	80	40.4%	43.1%	44.7%	45.8%	46.5%	47.1%	47.6%	47.9%	48.2%	48.5%	48.7%	48.8%	49.0%	49.1%	49.2%	49.4%
	84	43.2%	46.1%	47.8%	49.0%	49.8%	50.4%	50.9%	51.3%	51.6%	51.9%	52.1%	52.3%	52.4%	52.6%	52.7%	52.8%
	88	43.1%	45.9%	47.6%	48.8%	49.6%	50.2%	50.7%	51.1%	51.4%	51.6%	51.9%	52.0%	52.2%	52.4%	52.5%	52.6%
	92	42.9%	45.8%	47.5%	48.6%	49.4%	50.0%	50.5%	50.9%	51.2%	51.5%	51.7%	51.9%	52.0%	52.2%	52.3%	52.4%
	96	42.8%	45.7%	47.4%	48.5%	49.3%	50.0%	50.4%	50.8%	51.1%	51.4%	51.6%	51.8%	52.0%	52.1%	52.2%	52.3%