
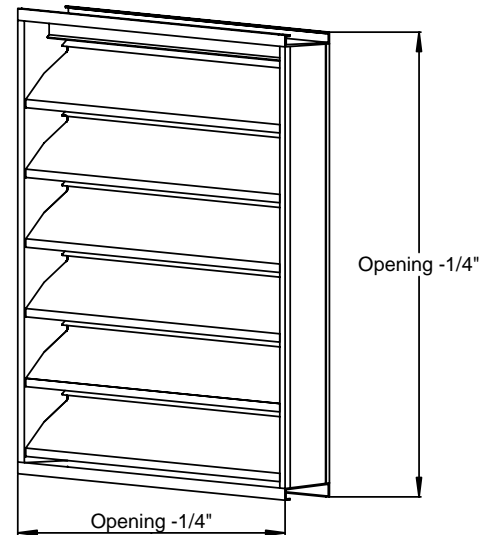


GAP 2620 & 2625 HI-PRO 6 INCH EXTRUDED ALUMINIUM STATIONARY STORMPROOF LOUVER

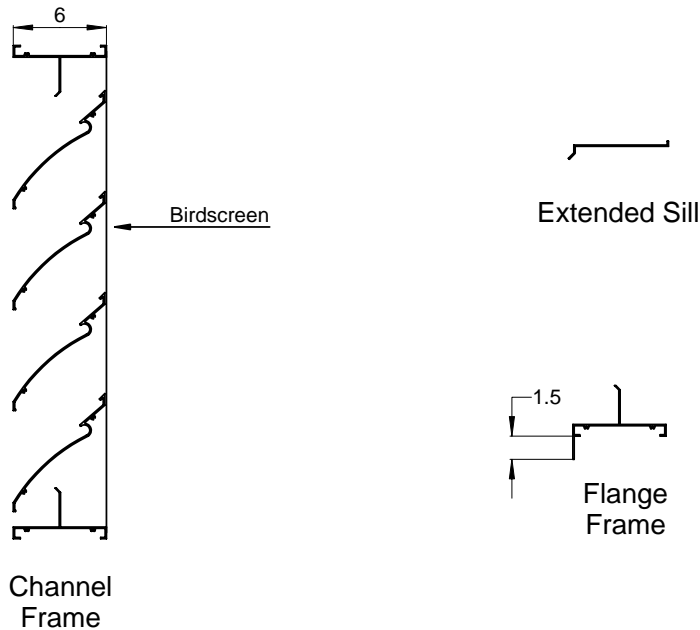

STANDARD CONSTRUCTION

Depth:	6 Inches (150 mm)		
Frame Style:	Specify 2620 For Channel Frame Specify 2625 For Flange Frame		
Frame Thickness:	0.085"	6063-T5	Extruded Aluminium
Blade Thickness:	0.085"	6063-T5	Extruded Aluminium
Blade Centres:	7 1/4 Inches (184 mm)		
Blade Angle:	45 Degrees		
Minimum Height:	16 Inches (406 mm)		
Maximum Panel Width:	72 Inches (1829 mm)		
Maximum Panel Height:	120 Inches (3048 mm)		
Standard Finish:	Mill		
Standard Birdscreen:	1/2" x 1/2" Galvanized		

Free Area of 48" x 48" Unit: 8.06 Sq. ft. (0.743 m²)
Free Area

Free Area Percentage: 50 Percent

AVAILABLE ACCESSORIES

Bird Screen:	1/4 x 1/4 Inter Crimped Aluminium 1/2 x 1/2 Inter Crimped Aluminium
Insect Screen:	18 x 14 Mesh
Finish:	Mill Finish (Standard) Paint Color #: <u>V</u>
Anodized Finish:	Clear Light Bronze Medium Bronze Dark Bronze
Accessories:	Aluminium Blank Off Panel 1" or 2" Insulated Blank Off Panel Hinged Frame Assembled with Stainless Steel Fasteners Hinged Frame and Louvered Access Door Security Bars Extended Sills Extended Sleeves Filter Racks Custom Geometric Shapes

Models: 2620 & 2625

6" Extruded Aluminium Stormproof Louver


Free Area in Square Feet

WIDTH IN INCHES

	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72
16	0.50	0.65	0.79	0.93	1.07	1.21	1.36	1.50	1.64	1.78	1.92	2.06	2.21	2.35	2.49
20	0.79	1.02	1.24	1.46	1.69	1.91	2.13	2.36	2.58	2.80	3.03	3.25	3.47	3.69	3.92
24	1.03	1.31	1.60	1.89	2.18	2.46	2.75	3.04	3.33	3.62	3.90	4.19	4.48	4.77	5.05
28	1.31	1.68	2.05	2.42	2.79	3.16	3.53	3.90	4.27	4.63	5.00	5.37	5.74	6.11	6.48
32	1.44	1.85	2.25	2.66	3.07	3.47	3.88	4.28	4.69	5.09	5.50	5.90	6.31	6.71	7.12
36	1.60	2.04	2.49	2.94	3.39	3.84	4.28	4.73	5.18	5.63	6.07	6.52	6.97	7.42	7.87
40	1.96	2.51	3.06	3.61	4.16	4.70	5.25	5.80	6.35	6.90	7.45	8.00	8.55	9.10	9.65
44	2.12	2.72	3.32	3.91	4.51	5.10	5.70	6.30	6.89	7.49	8.08	8.68	9.28	9.87	10.47
H 48	2.48	3.18	3.88	4.57	5.27	5.97	6.67	7.36	8.06	8.76	9.45	10.15	10.85	11.54	12.24
E 52	2.70	3.46	4.21	4.97	5.73	6.49	7.24	8.00	8.76	9.52	10.27	11.03	11.79	12.55	13.30
56	3.00	3.84	4.68	5.52	6.36	7.20	8.04	8.88	9.73	10.57	11.41	12.25	13.09	13.93	14.77
I 60	3.23	4.14	5.05	5.96	6.87	7.77	8.68	9.59	10.50	11.41	12.31	13.22	14.13	15.04	15.95
64	3.52	4.50	5.49	6.48	7.46	8.45	9.44	10.42	11.41	12.40	13.39	14.37	15.36	16.35	17.33
G 68	3.77	4.83	5.89	6.95	8.00	9.06	10.12	11.18	12.24	13.30	14.35	15.41	16.47	17.53	18.59
72	3.91	5.01	6.11	7.20	8.30	9.40	10.50	11.59	12.69	13.79	14.89	15.98	17.08	18.18	19.28
H 76	4.17	5.33	6.50	7.67	8.84	10.01	11.18	12.35	13.52	14.69	15.86	17.03	18.20	19.37	20.53
80	4.45	5.69	6.94	8.19	9.44	10.69	11.93	13.18	14.43	15.68	16.93	18.17	19.42	20.67	21.92
84	4.68	5.99	7.31	8.62	9.93	11.25	12.56	13.87	15.19	16.50	17.81	19.13	20.44	21.75	23.07
T 88	4.98	6.38	7.78	9.18	10.58	11.97	13.37	14.77	16.17	17.57	18.97	20.37	21.76	23.16	24.56
92	5.20	6.66	8.12	9.58	11.03	12.49	13.95	15.41	16.87	18.33	19.79	21.25	22.71	24.17	25.63
96	5.52	7.07	8.62	10.16	11.71	13.26	14.81	16.36	17.91	19.46	21.01	22.56	24.10	25.65	27.20
100	5.72	7.32	8.93	10.53	12.14	13.74	15.35	16.95	18.56	20.16	21.77	23.37	24.98	26.58	28.19
104	5.84	7.48	9.12	10.76	12.39	14.03	15.67	17.31	18.95	20.59	22.23	23.87	25.51	27.14	28.78
108	6.24	7.99	9.74	11.49	13.24	14.99	16.74	18.49	20.24	21.99	23.75	25.50	27.25	29.00	30.75
112	6.36	8.15	9.93	11.72	13.50	15.29	17.07	18.86	20.65	22.43	24.22	26.00	27.79	29.57	31.36
116	6.73	8.62	10.51	12.40	14.29	16.17	18.06	19.95	21.84	23.73	25.62	27.51	29.40	31.29	33.18
120	6.88	8.81	10.74	12.67	14.61	16.54	18.47	20.40	22.33	24.26	26.19	28.13	30.06	31.99	33.92

2620 Stormproof Water Penetration

15 Minute Duration, Test Size (48x48)

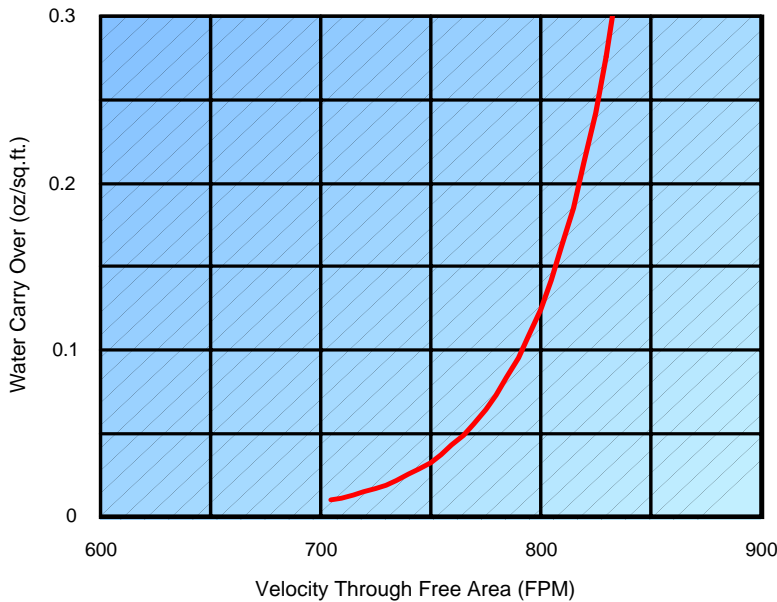

Pressure Drop - Intake

