
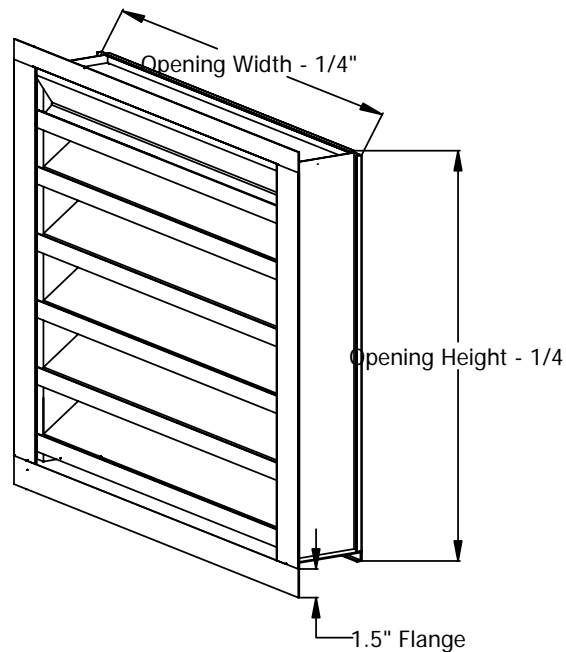



GAP 2630 6 INCH EXTRUDED
ALUMINIUM DRAINABLE STATIONARY LOUVER

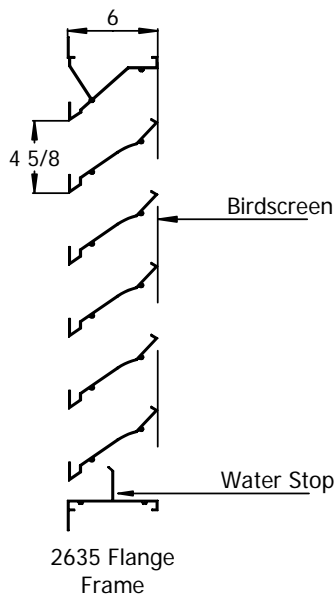

STANDARD CONSTRUCTION

- Depth:** 6 Inches (150 mm)
- Frame Style:** Specify 2630 for Channel Frame
Specify 2635 for Flange Frame
- Frame Thickness:** 0.095" 6063-T5 Extruded Aluminium
- Blade Thickness:** 0.09" 6063-T5 Extruded Aluminium
- Blade Centres:** 4 5/8 Inches (117 mm)
- Blade Angle:** 40 Degrees
- Minimum Height:** 16 Inches (406 mm)
- Maximum Panel Width:** 72 Inches (1829 mm)
- Maximum Panel Height:** 120 Inches (3048 mm)
- Standard Finish:** Mill
- Free Area of 48" x 48" Unit:** 8.30 Sq.ft. Free Area

Free Area Percentage: 51.9 Percent

*Louver will be manufactured 1/4" smaller than given opening dimensions, unless otherwise specified.

AVAILABLE ACCESSORIES

- Bird Screen:** 1/2 x 1/2 Galvanized (Standard)
1/2 x 1/2 Aluminium
- Insect Screen:** 18 x 14 Mesh
- Finish:** Mill Finish (Standard)
Paint Color #: V
- Anodized Finish:** Clear
Light Bronze
Medium Bronze
Dark Bronze
- Accessories:** Blank Off Panel
Insulated Blank-off Panel (1 or 2")
All Welded Construction
Hinged Frame
Extend Sills & Sleeves
Filter Racks

Continuous Line construction is NOT recommended.

6" Extruded Aluminium Drainable Louver


Free Area in Square Feet

WIDTH IN INCHES


	16	20	24	28	32	36	40	44	48	52	56	60	64	68	72
16	0.61	0.79	0.97	1.15	1.32	1.50	1.68	1.86	2.04	2.22	2.39	2.57	2.75	2.93	3.11
20	0.84	1.08	1.32	1.57	1.81	2.05	2.30	2.54	2.78	3.03	3.27	3.51	3.76	4.00	4.24
24	1.15	1.49	1.82	2.16	2.49	2.82	3.16	3.49	3.83	4.16	4.50	4.83	5.17	5.50	5.84
28	1.41	1.82	2.23	2.64	3.05	3.46	3.87	4.28	4.70	5.11	5.52	5.93	6.34	6.75	7.16
32	1.59	2.05	2.52	2.98	3.44	3.91	4.37	4.83	5.29	5.76	6.22	6.68	7.15	7.61	8.07
36	1.79	2.31	2.83	3.35	3.87	4.39	4.91	5.44	5.96	6.48	7.00	7.52	8.04	8.56	9.08
40	2.02	2.61	3.20	3.79	4.37	4.96	5.55	6.14	6.73	7.31	7.90	8.49	9.08	9.67	10.25
44	2.26	2.92	3.58	4.23	4.89	5.55	6.21	6.86	7.52	8.18	8.84	9.49	10.15	10.81	11.47
H 48	2.49	3.22	3.94	4.67	5.39	6.12	6.85	7.57	8.30	9.02	9.75	10.47	11.20	11.92	12.65
E 52	2.81	3.62	4.44	5.25	6.07	6.89	7.70	8.52	9.33	10.15	10.97	11.78	12.60	13.41	14.23
E 56	3.05	3.93	4.82	5.71	6.59	7.48	8.37	9.25	10.14	11.03	11.91	12.80	13.68	14.57	15.46
I 60	3.29	4.24	5.20	6.15	7.11	8.06	9.02	9.98	10.93	11.89	12.84	13.80	14.75	15.71	16.67
I 64	3.66	4.73	5.79	6.86	7.92	8.99	10.05	11.12	12.18	13.25	14.31	15.38	16.44	17.51	18.58
G 68	3.66	4.73	5.79	6.86	7.92	8.99	10.06	11.12	12.19	13.25	14.32	15.38	16.45	17.51	18.58
G 72	3.90	5.03	6.17	7.30	8.44	9.57	10.71	11.84	12.98	14.11	15.25	16.38	17.52	18.65	19.78
H 76	4.13	5.34	6.54	7.74	8.94	10.15	11.35	12.55	13.75	14.96	16.16	17.36	18.56	19.77	20.97
H 80	4.36	5.63	6.89	8.16	9.43	10.70	11.96	13.23	14.50	15.77	17.03	18.30	19.57	20.84	22.10
84	4.73	6.11	7.49	8.86	10.24	11.62	12.99	14.37	15.74	17.12	18.50	19.87	21.25	22.63	24.00
T 88	4.94	6.37	7.81	9.24	10.68	12.12	13.55	14.99	16.42	17.86	19.30	20.73	22.17	23.60	25.04
92	5.23	6.75	8.28	9.80	11.32	12.84	14.36	15.89	17.41	18.93	20.45	21.97	23.50	25.02	26.54
96	5.31	6.85	8.40	9.94	11.49	13.03	14.58	16.12	17.67	19.21	20.76	22.30	23.85	25.39	26.94
100	5.54	7.15	8.77	10.38	11.99	13.60	15.21	16.83	18.44	20.05	21.66	23.27	24.89	26.50	28.11
104	5.78	7.46	9.15	10.83	12.51	14.19	15.87	17.55	19.24	20.92	22.60	24.28	25.96	27.65	29.33
108	6.01	7.75	9.50	11.25	12.99	14.74	16.49	18.24	19.98	21.73	23.48	25.22	26.97	28.72	30.47
112	6.28	8.10	9.93	11.76	13.58	15.41	17.23	19.06	20.89	22.71	24.54	26.36	28.19	30.02	31.84
116	6.55	8.45	10.36	12.26	14.17	16.07	17.98	19.88	21.79	23.70	25.60	27.51	29.41	31.32	33.22
120	6.82	8.81	10.79	12.77	14.76	16.74	18.73	20.71	22.70	24.68	26.66	28.65	30.63	32.62	34.60

2630 Drainable Water Penetration

15 Minute Duration, Test Size (48x48)

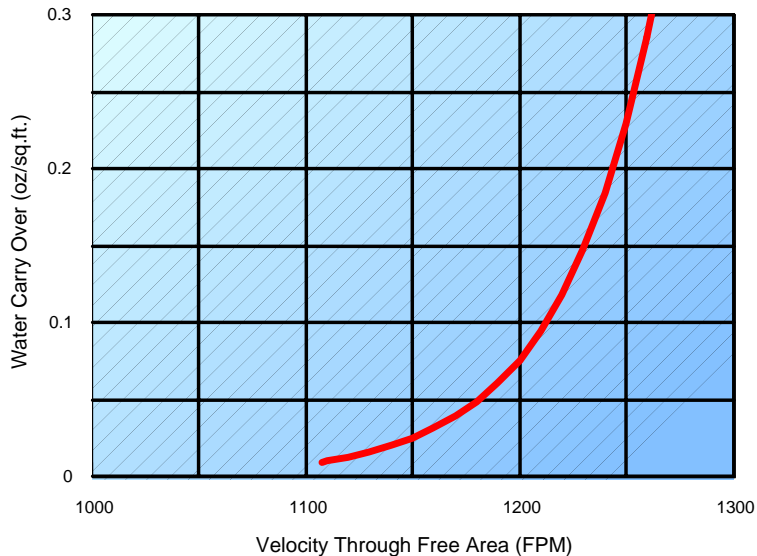

2630 Pressure Drop

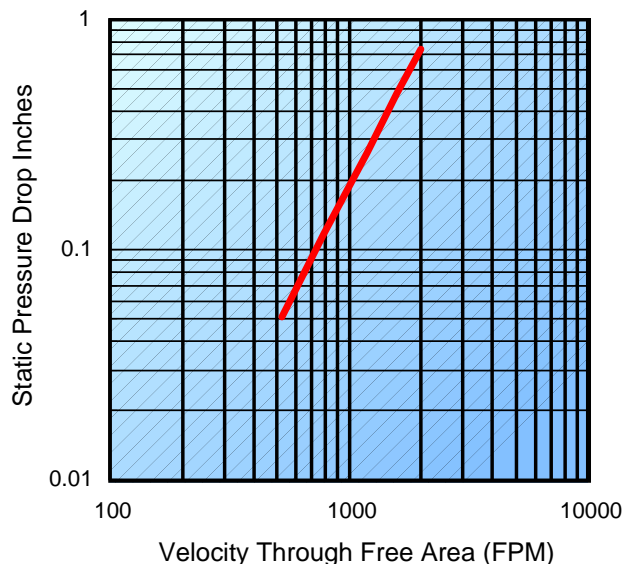

Intake