

New Explosion Proof Tube Axial Fan


Features

- UL recognized for hazardous duty per NEC Class 1, Div II, Groups A, B, C, D (File No. E210881)
- Thermally Protected
- Operating Temperature Code T3C
- Operating voltage: 115V, 1-ph, 50/60 Hz
- Weight: 2.4 lbs
- MTBF: 200,000 hrs at 50C
- Noise: 55 dbA (SPL- 3 ft from fan)
- Available with Fan Performance Sensor (FPS)
- Finger guard- optional
 - 504368 Cadium plated
 - 508370 – SS material

Electrical Specifications (Nominal)

P/N	Motor Series	Voltage	Frequency	Cap.* Mfd.	RPM	Line Amps	Full Load Watts	Locked Rotor Amps	Free Del. CFM	Max. Ambient
081057	1790Y9	115 AC, 1 phase	50 Hz	3.0	2820	0.29	32	0.48	190	100C
			60 Hz	3.0	3340	0.26	30	0.49	230	100C

*Running capacitor not supplied by G.A.P. Capacitor voltage ratings are 220VAC.

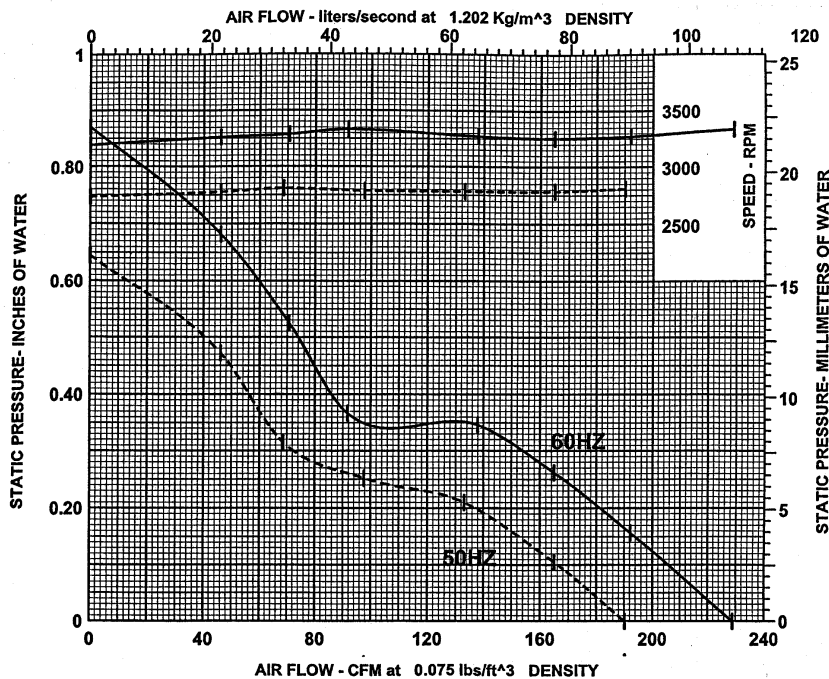

General Air Products, 123 Waterloo St, Kitchener, ON, N2H 3V5

Phone: 519 745 6129 Fax: 519 745 5970

www.genairproducts.com

info@genairproducts.com